



The diagram above is just for reference. Please take the appearance of the actual product as the standard.

WATER PURIFIER

Instruction Manual

Model: NL-3049WH

Before installing and operating your water purifier, please read the instruction manual carefully and keep it for future reference.

Dear Customers,

Welcome to use the Water Purification Expert, which utilizes six grade of high-precision filtration system, the effluent water is pure water which tastes better. Automatically control system make you to use this product easily, reassuredly and comfortably.

Water Purification Expert brings you safe and excellent drinking water, enables your three meals much more delicious, and makes you and your family members enjoy healthy and top-grade life.

TABLE OF CONTENTS

1. Precaution ----- 1

1-1 Safety Issues ----- 1

1-2 Packing List ----- 2

2. Your Water Purification Expert ----- 2~4

2-1 Part Name of Water Purifier ----- 2

2-2 Product Features ----- 2

2-3 Product Functions ----- 3

2-4 Working Principle ----- 3

3. Guide and Maintenance ----- 5~6

3-1 Use Guide ----- 4

3-2 Filter Replacement Cycle ----- 5

3-3 Maintenance ----- 6

3-4 Troubleshooting ----- 6

4. Technical Parameters ----- 7

1. PRECAUTION

1-1 Safety Issues

Please note the following brief icons and rules for safe use of this product



Troubleshooting

When the machine fails, please disconnect the power and water source immediately




Maintenance

Never remove the parts on the machine to avoid leakage or damage



Avoid contact with children

Never have the machine operated by a child



Temperature

Please use the product in a dry place with the water temperature of 4-38°C.



Electricity prevention

If the machine is not in use for a long time, keep the RO membrane humid.



Accessories and filters

To maintain the normal operation of the machine, be sure to use accessories and filters supplied by original company



Emergency call

For any help, please call the local sale service center.



Correct repair service

This machine can only be repaired by qualified personnel designated by this company



Avoid direct sunshine

Do not install the machine in a place exposed to direct sunshine



Anti-freeze

Never store or expose the product duct in an environment less than 0°C


1. Any losses caused by improper operation are assumed by the user.
2. This appliance is intended to be used in household and similar applications such as:
 - Staff kitchen areas in shops, offices and other working environments;
 - Farm houses;
 - By clients in hotels, motels and other residential type environments;
 - Bed and breakfast type environments.
3. This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety. Children should be supervised to ensure that they do not play with the appliance.
4. The appliance is only to be used with the power supply unit provided with the appliance.
5. If the supply cord is damaged, it must be replaced by the manufacturer, its service agent or similarly qualified persons in order to avoid a hazard.
6. The maximum inlet water pressure 57psi (0.4MPa);
The minimum inlet water pressure 14.2psi (0.1MPa);
7. If the pressure is higher, it's recommended to add a pressure reducer before the product by the consumer.
8. The appliance must not be immersed.
9. The new hose-sets supplied with the appliance are to be used and that old hose-sets should not be reused.
10. This machine is applicable to the water environment with TDS value less than 250 in case of the high water hardness lead to incrustation even breakdown of the hot tank.
11. The appliance must not be cleaned by a water jet.
12. This product is not recommended to use in areas above 1,500m altitude.

1-2 packing list

Packing box	RO Water purifier (1 set) 1/4" PE pipe RO membrane (1pc)
Materials bag	User's Manual (1copy)
Parts bag	SS Gooseneck faucet (1 set) Three-way connector and valve (1 set) Pressure tank ball valve (1 pc)
Separate pack	Pressure tank (1pc)

2. YOUR WATER PURIFICATION EXPERT

2-1 Part Name of Water Purifier

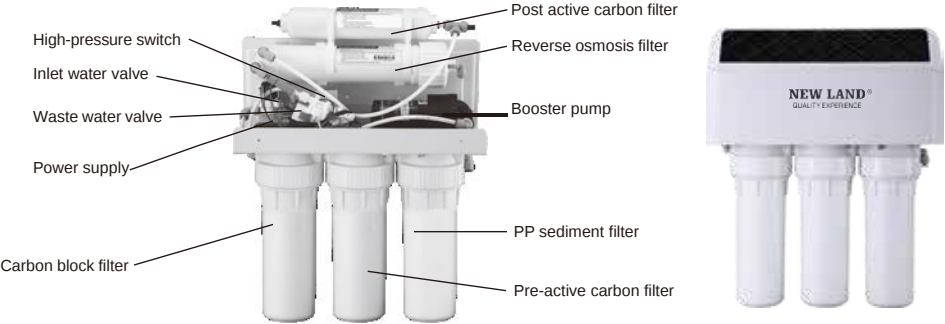

2-2. Product Features

- 1. Five-stage high-precision filtration
Five stage RO filtration and pivotal filtration adopts high-precision US RO membrane filter.
- 2. Automatic control system
Automatic water control and RO membrane flushing
- 3. Food-grade material
All filter, housing and components in touch with water is of using food grade healthy materials.
- 4. Quick fit technology

2-3. Product Functions

1. Effective cleaning

Through high-precision five stage filtration system, move granules, iron rust, colloids, residual chlorines, organic substance and impurities in water, and the effluent water is pure water, conforming to requirements of Sanitary Standard for Hygienic Safety and Function on Treatment Devices of Drinking Water - RO Water Treatment Devices.

2. Easy to get water

Strong penetrability of membrane, sufficient water supply, generated water used for cleaning and cooking, drained water used for cleaning.

3. Easy for cleaning and operation


Automatic water control, the user can clean the RO membrane automatically.

4. Easy maintenance

Quick connector is very convenient for maintenance.

2-4. Working Principle

● Flowchart of Water Generation

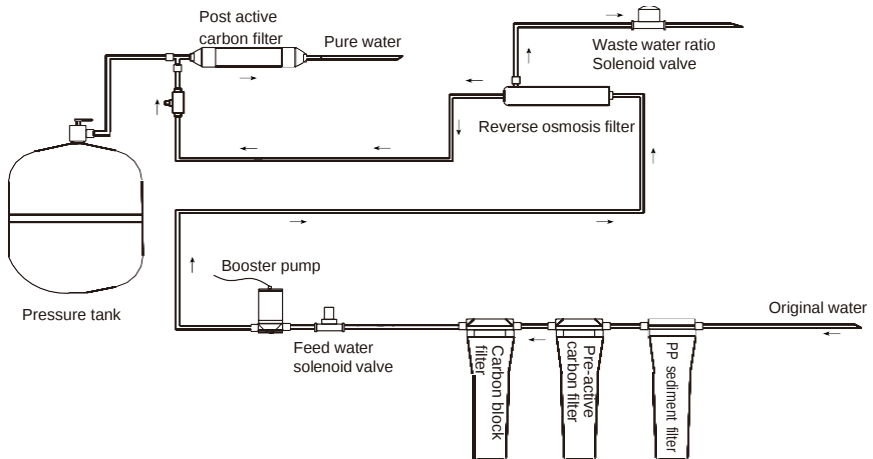

● Introduction to Filter Functions

Stage	Name	Function
Stage 1	PP sediment filter	Carry out coarse filtration of the original water, and filter out mud, sand, impurity, iron rust and suspension, etc.
Stage 2	Pre-active carbon filter	Absorb unusual colors and odors, Remove residual chlorine and organic substances in water.
Stage 3	Carbon block filter	Absorb unusual colors and odors, Remove residual chlorine and organic substances in water.
Stage 4	Reverse osmosis filter	Filtration accuracy is nearest to 0.001 -0.0001um, only allowing the passage of water molecules, and almost completely retaining harmful substances in water such as pesticide, bacteria, virus, and heavy metal ions.
Stage 5	Post active carbon filter	Further absorb micro-molecules organic substances in water. Make water taste better.


3. USE GUIDE AND MAINTENANCE



Your water purifying expert results from excellent design and elaborate technology. Please use it carefully. Following suggestions will help you effectively use the machine. For any difficulty, please dial the telephone of the local sale service center or the national free service hotline.

3-1. Use Guide

1. Firstly make sure the machine is well installed by the qualified personnel.
2. Make sure water source is open and power supply is connected.
3. Installation of water Purifier:

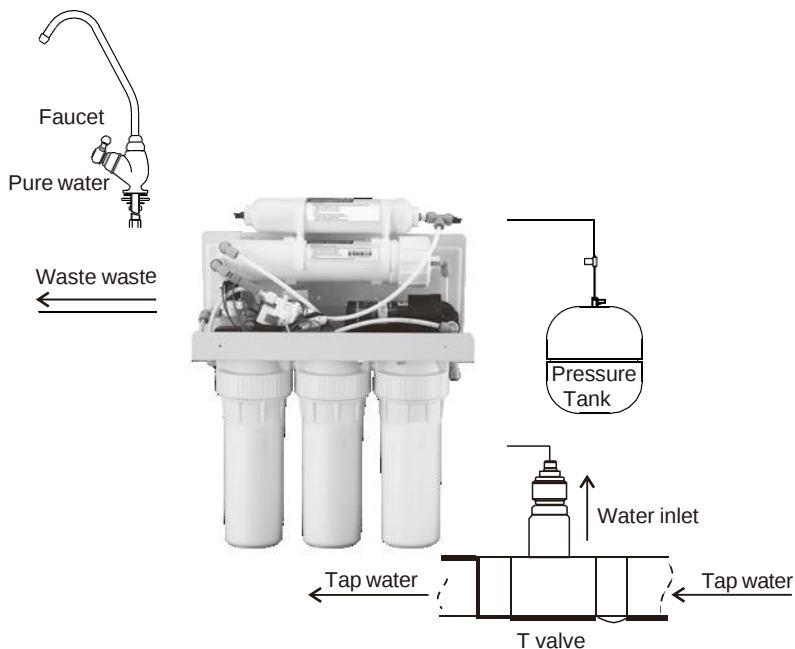

3-2. Filter Replacement Cycle

PP sediment filter	Pre-active carbon filter	Carbon block filter	Reverse osmosis filter	Post active carbon filter
3-6months	6-12months	6-12months	12-24 months	6-12months

Note:

The data above are for references only. It is based on 10L per daily drinking water. The specific cycle for replacement of filters varies with local water and water amount consumed.

3-3. Maintenance

1. Replace the filters in time to keep pure water quality.
2. Move the product carefully and slightly, never place the product in a direct sunshine.
3. Never put the product in a place where water may freeze to prevent the filters from damage due to freezing.
4. Never remove the parts on the machine to avoid leakage or damage.
5. By using a cloth dipped in water, clean the water purifier with soft detergent rather than strong volatile solvent such as gasoline.
6. In case of long-term no use, pull out the power plug, close the feed ball valve and cut off the water source. Open the faucet to drain out the water in pressure tank when re-use.
7. In case of failure, disconnect the water source and power supply promptly, and inform the local service agency immediately to eliminate the failure.
8. In the cases where the water purifier is used for the first time or reused after long time idle, drain out the first two tanks of water through the gooseneck faucet at first.
9. Drain out 500ml water everyday at the first time to clear the water in pipe.
10. Please replace the filters in time as requested. It can ensure better filtration effect.

3-4. Troubleshooting

In case of the following circumstances, the user shall carry out inspection according to the requirements below. If unresolved, please contact the local dealer or local service agency and inform product models and failure details.

Failure	Cause	Solution
Machine fails to run	Feed ball valve closed	Open the feed ball valve
	Power supply not put through	Switch on power supply
	Booster pump not running	Contact the local service agency
	Power cut	Wait for the power resumed
Noise occurring in operation	Booster failing or fastening screws loosening	Contact the local service agency
	Insufficient water in booster	Increase the water pressure of original water
Too much drop in amount of water generated or no water out	RO membrane jammed	Contact the local service agency
	Filter not replaced in time, beyond the use time	Contact the local service agency to replace the filter
No water out from gooseneck faucet	Post active carbon filter jammed	Contact the local service agency to replace the filter
	Pre-treatment filters jammed	
	RO membrane jammed	
Poor quality of water out	Post active carbon filter not replaced in time, beyond the use time	Inform the local service agency to replace the filter timely
	RO membrane damaged	
	Fine carbon powder contained in water	Wash post active carbon powder away or replace post active carbon filter
Booster pump not stopping	High-pressure switch damaged	Please contact the local service agency
	Waste water ratio solenoid valve damaged	

4. TECHNICAL PARAMETERS

Model	NL-3049WH
Rated voltage	110-240V~
Rated frequency	50/60Hz
Rated flow of purified water	7.8L/h
Stage 1	10" PP sediment filter
Stage 2	10" Pre-active carbon filter
Stage 3	10" Carbon block filter
Stage 4	10" 75gal Reverse osmosis filter
Stage 5	T33 Post active carbon filter
Applicable water	Tap water
Packing dimensions (L*W*H)	785*360*400 (mm)

مشتریان گرامی،

به دستگاه تصفیه‌کننده آب «تصفیه آب تخصصی» خوش آمدید. این دستگاه از یک سیستم فیلتراسیون با دقت بالا و شش مرحله‌ای استفاده می‌کند که خروجی آن آب تصفیه شده با طعم بهتر است. سیستم کنترل خودکار باعث می‌شود تا به راحتی، با اطمینان خاطر و آسودگی از این محصول استفاده کنید.

«تصفیه آب تخصصی» آب آشامیدنی سالم و با کیفیت عالی را برای شما به ارمغان می‌آورد، طعم غذاهای شما را دلپذیرتر می‌کند و به شما و اعضای خانواده‌تان کمک می‌کند تا از زندگی سالم و با کیفیت بالا لذت ببرید.

فهرست

۱. احتیاط----- ۲
- ۱-۱ نکات ایمنی----- ۲
- ۲-۱ لیست اقلام بسته‌بندی----- ۳
۲. تصفیه آب تخصصی شما----- ۴
- ۱-۲ نام اجزای دستگاه تصفیه‌کننده آب----- ۴
- ۲-۲ ویژگی‌های محصول----- ۴
- ۳-۲ عملکردهای محصول----- ۶
- ۴-۲ نحوه عملکرد----- ۶
۳. راهنمای استفاده و نگهداری----- ۷
- ۱-۳ راهنمای استفاده----- ۷
- ۲-۳ چرخه تعویض فیلتر----- ۸
- ۳-۳ نگهداری----- ۸
- ۴-۳ عیب‌یابی----- ۹
۴. مشخصات فنی----- ۱۰

۱ احتیاط

۱-۱ مسائل ایمنی

به نمادها و قوانین مختصر زیر برای استفاده ایمن از این محصول توجه کنید:

لوازم جانبی و فیلترها
برای حفظ عملکرد بهینه دستگاه،
حتماً از لوازم جانبی و فیلترهای
تأمین شده توسط شرکت اصلی
استفاده کنید.



تماس اضطراری
برای هرگونه کمک، لطفاً با مرکز
خدمات فروش محلی یا خط تلفن
سراسری خدمات تماس بگیرید.



تعمیر مجاز
این دستگاه فقط توسط پرسنل
مجبور تعیین شده از سوی این
شرکت قابل تعمیر است.



دور از نور مستقیم خورشید
دستگاه را در معرض نور مستقیم
خورشید نصب نکنید.



ضد یخ
هرگز محصول یا مجرای خروج
محصول را در محیطی با دمای
کمتر از ۰ درجه سانتی گراد
نگهداری یا در معرض آن قرار
ندهید.



عیب یابی

در صورت بروز هرگونه
مشکل در دستگاه، لطفاً
فوراً برق و منبع آب را
قطع کنید.



نگهداری

برای جلوگیری از نشستی یا
آسیب، هرگز قطعات
دستگاه را جدا نکنید.




دور از دسترس کودکان
هرگز از این دستگاه توسط
کودکان استفاده نکنید.



دما

لطفاً از محصول در مکانی
خشک با دمای بین ۴ تا
۴۳ درجه سانتی گراد
استفاده کنید.



پیشگیری از

برق گرفتگی

برای جلوگیری از نشت
برق



نکات مهم:

۱. هرگونه خسارتی که به دلیل کاربری نادرست ایجاد شود، بر عهده کاربر است.
۲. این دستگاه برای استفاده در محیط‌های خانگی و مشابه آن در نظر گرفته شده است، مانند:
 - آبدارخانه‌های پرسنل در مغازه‌ها، دفاتر و سایر محیط‌های کاری
 - خانه باغ‌ها
 - استفاده توسط مهمانان در هتل‌ها، متل‌ها و سایر محیط‌های اقامتی مسکونی
 - محیط‌های ارائه دهنده خواب و صبحانه
۳. این دستگاه برای استفاده توسط افرادی (از جمله کودکان) با توانایی‌های جسمی، حسی یا ذهنی محدود یا عدم تجربه و دانش در نظر گرفته نشده است، مگر اینکه توسط فردی که مسئول ایمنی آنهاست، نظارت شوند یا دستورالعمل در مورد استفاده از دستگاه به آنها داده شود. باید بر کودکان نظارت شود تا با دستگاه بازی نکنند.
۴. این دستگاه فقط باید با واحد منبع تغذیه همراه با دستگاه استفاده شود.
۵. سیم برق در صورت آسیب دیدن، باید توسط سازنده، نماینده خدمات آن یا فردی با صلاحیت مشابه تعویض شود تا از خطر جلوگیری شود.
۶. حداکثر فشار ورودی آب ۰.۴ مگاپاسکال (۵۷ پوند بر اینچ مربع)؛ حداقل فشار ورودی آب ۰.۱ مگاپاسکال (۱۴.۲ پوند بر اینچ مربع)
۷. در صورت بالاتر بودن فشار، توصیه می‌شود مصرف کننده قبل از محصول، یک کاهنده فشار اضافه کند.
۸. دستگاه نباید غوطه‌ور شود.
۹. از مجموعه شلنگ‌های جدیدی که به همراه دستگاه ارائه می‌شود، استفاده شود و از شلنگ‌های قدیمی استفاده مجدد نشود.

۱۰. این دستگاه برای محیط‌های آبی با مقدار سختی کل املاح محلول (TDS) کمتر از ۲۵۰ قابل استفاده است، در صورت سختی بالای آب، منجر به رسوب و حتی خرابی مخزن داغ می‌شود.

۱۱. دستگاه نباید با جت آب تمیز شود.

۱۲. توصیه نمی‌شود از این محصول در مناطقی با ارتفاع بالاتر از ۱۵۰۰ متر استفاده شود.

۲-۱ لیست اقلام بسته‌بندی

جعبه بسته‌بندی	دستگاه تصفیه‌کننده آب RO (۱ عدد)، لوله PE (۴/۱ اینچ) (۱ عدد)، ممبران RO (۱ عدد)
کیسه مواد	دفترچه راهنما (۱ نسخه)
کیسه قطعات	شیر گلوئی استیل (۱ عدد)، سه‌راهی و شیر (۱ عدد)، شیر توپی مخزن فشار (۱ عدد)
بسته جداگانه	مخزن فشار (۱ عدد)

۲. تصفیه آب تخصصی شما

۲-۱ نام اجزای دستگاه تصفیه‌کننده آب




۲-۲. ویژگی‌های محصول

۱. فیلتراسیون پنج مرحله‌ای با دقت بالا: فیلتراسیون اسمز معکوس پنج مرحله‌ای و فیلتراسیون محوری از فیلتر ممبران RO با دقت بالای آمریکایی استفاده می‌کند.
۲. سیستم کنترل خودکار: سیستم کنترل خودکار آب و شستشوی ممبران RO
۳. مواد اولیه با گرید غذایی در تمام فیلترها: محفظه‌ها و اجزایی که با آب در تماس هستند از مواد بهداشتی با گرید غذایی ساخته شده‌اند.
۴. فناوری اتصالات سریع

۲-۳. عملکردهای محصول

۱. تصفیه مؤثر با استفاده از سیستم فیلتراسیون پنج مرحله‌ای با دقت بالا: این دستگاه قادر است املاح، زنگ آهن، ذرات کلوئیدی، کلر باقیمانده، مواد آلی و ناخالصی‌های موجود در آب را حذف کند و خروجی آن آب تصفیه شده مطابق با استانداردهای بهداشتی برای ایمنی و عملکرد بهداشتی در دستگاه‌های تصفیه آب آشامیدنی - دستگاه‌های تصفیه آب اسمز معکوس باشد.
۲. دسترسی آسان به آب نفوذپذیری بالای فیلتر ممبران باعث تأمین کافی آب می‌شود. آب خالص تولیدی برای آشپزی و نوشیدن و آب خروجی برای نظافت قابل استفاده است.
۳. سهولت در تمیز کردن و کاربری کنترل خودکار آب به کاربر امکان می‌دهد فیلتر ممبران را به صورت خودکار تمیز کند.
۴. نگهداری آسان اتصالات سریع برای نگهداری دستگاه بسیار راحت هستند.

۴-۲. نحوه عملکرد نمودار جریان تولید آب

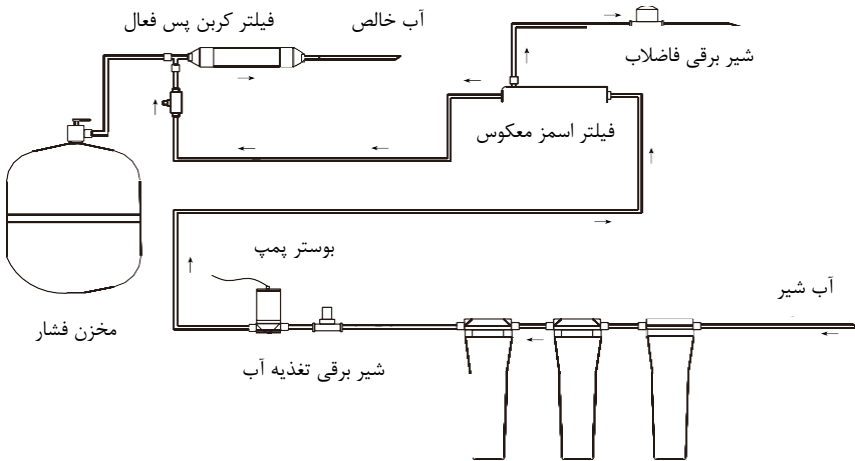

عملکرد فیلتر

مرحله	نام	عملکرد
مرحله ۱	فیلتر رسوب PP	فیلتراسیون درشت آب اولیه را انجام می‌دهد. آلودگی‌هایی مانند گل‌ولای، شن، ناخالصی، زنگ آهن و ذرات معلق را حذف می‌کند.
مرحله ۲	فیلتر کربن فعال پیش از تصفیه	رنگ و بوی نامطبوع آب را جذب می‌کند. کلر باقیمانده و مواد آلی موجود در آب را حذف می‌کند.
مرحله ۳	فیلتر کربن بلاک	رنگ و بوی نامطبوع آب را جذب می‌کند. کلر باقیمانده و مواد آلی موجود در آب را حذف می‌کند. (تکرار برای تأکید بر عملکرد مشابه)
مرحله ۴	فیلتر اسمز معکوس	دقت فیلتراسیون تا ۰.۰۰۱ - ۰.۰۰۰۱ میکرومتر دارد. تنها به مولکول‌های آب اجازه عبور می‌دهد. تقریباً به طور کامل مواد مضر موجود در آب مانند آفت‌کش‌ها، باکتری‌ها، ویروس‌ها و یون‌های فلزات سنگین را فیلتر می‌کند.
مرحله ۵	فیلتر کربن فعال پس از تصفیه	میکرو مولکول‌های مواد آلی باقی‌مانده در آب را جذب می‌کند. باعث بهبود طعم آب می‌شود.


۳. راهنمای استفاده و نگهداری

دستگاه تصفیه‌کننده آب شما حاصل طراحی عالی و فناوری پیشرفته است. لطفاً با دقت از آن استفاده کنید. برای بهره‌مندی مؤثر از دستگاه، نکات زیر را رعایت نمایید. در صورت بروز هرگونه مشکل، با تلفن مرکز خدمات فروش محلی یا خط تلفن سراسری رایگان خدمات پس از فروش تماس بگیرید.



۳-۱. راهنمای استفاده

۱. ابتدا مطمئن شوید که دستگاه توسط پرسنل مجرب به‌خوبی نصب شده است.
۲. مطمئن شوید که شیر ورودی آب باز است و برق وصل است.
۳. نصب دستگاه تصفیه‌کننده آب:

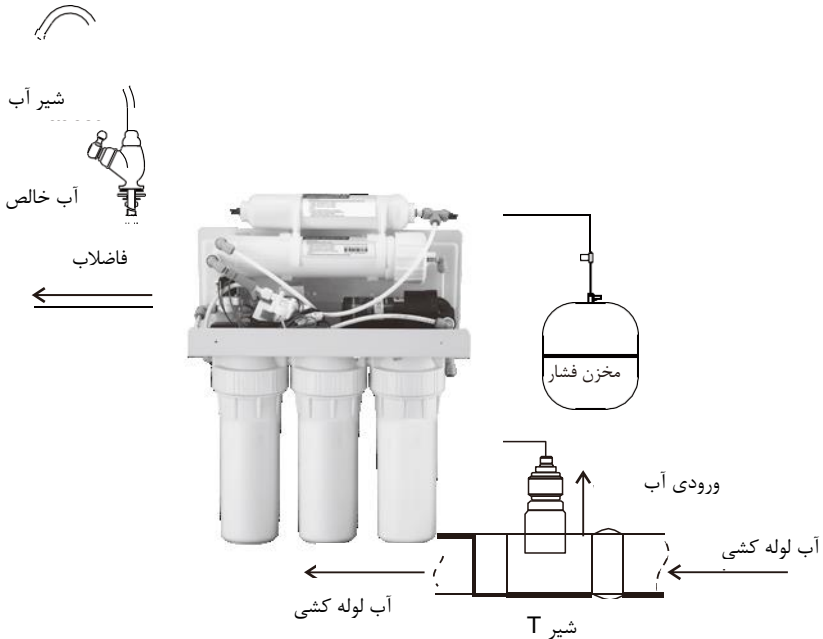

۲-۳ چرخه تعویض فیلتر

فیلتر رسوب PP	فیلتر کربن فعال پیش از تصفیه	فیلتر کربن بلاک	فیلتر اسمز معکوس	فیلتر کربن فعال پس از تصفیه
۶-۳ ماه	۱۲-۶ ماه	۱۲-۶ ماه	۲۴-۱۲ ماه	۱۲-۶ ماه

توجه:

مقادیر ذکر شده در بالا صرفاً جهت راهنمایی است و بر اساس مصرف روزانه ۱۰ لیتر آب آشامیدنی در نظر گرفته شده است. دوره خاص تعویض فیلترها با توجه به کیفیت آب منطقه و میزان مصرف آب متغیر است.

۳-۳. نگهداری

۱. برای حفظ کیفیت آب تصفیه شده، فیلترها را به موقع تعویض کنید.
۲. محصول را با دقت و به آرامی حمل کنید و هرگز آن را در معرض نور مستقیم خورشید قرار ندهید.
۳. هرگز محصول را در جایی قرار ندهید که آب یخ بزند تا از آسیب دیدن فیلترها در اثر یخ زدگی جلوگیری شود.
۴. برای جلوگیری از نشستی یا آسیب، هرگز قطعات دستگاه را جدا نکنید.
۵. با استفاده از پارچه‌ای آغشته به آب و شوینده ملایم، دستگاه تصفیه‌کننده آب را تمیز کنید. از حلال‌های فرار قوی مانند بنزین استفاده نکنید.
۶. در صورت عدم استفاده طولانی‌مدت، دوشاخه برق را بیرون بکشید، شیر تویی تغذیه را ببندید و منبع آب را قطع کنید. هنگام استفاده مجدد، شیر آب را باز کنید تا آب مخزن فشار تخلیه شود.
۷. در صورت خرابی، فوراً منبع آب و برق را قطع کرده و برای رفع مشکل با نمایندگی خدمات محلی تماس بگیرید.
۸. در صورت استفاده از دستگاه تصفیه‌کننده آب برای اولین بار یا پس از مدت طولانی

بدون استفاده، ابتدا دو مخزن اول آب را از طریق شیر گلوئی تخلیه کنید.
 ۹. برای تخلیه آب داخل لوله، در ابتدای استفاده روزانه ۵۰۰ میلی لیتر آب را تخلیه کنید.

۱۰. لطفاً فیلترها را طبق دستورالعمل به موقع تعویض کنید. این کار باعث بهبود عملکرد فیلتراسیون می شود.

۴-۳. عیب یابی

در صورت بروز موارد زیر، کاربر باید طبق الزامات زیر بازرسی انجام دهد. در صورت حل نشدن مشکل، با نمایندگی یا مرکز خدمات محلی تماس بگیرید و مدل محصول و جزئیات خرابی را گزارش دهید.

خرابی	دلیل	راه حل
دستگاه روشن نمی شود.	شیر تویی تغذیه بسته است.	شیر تویی تغذیه را باز کنید.
	دستگاه روشن نیست.	دستگاه را روشن کنید.
	پمپ تقویتی کار نمی کند.	با نمایندگی خدمات محلی تماس بگیرید.
صدای غیرعادی در هنگام کارکرد دستگاه وجود دارد.	قطعی برق	صبر کنید تا برق وصل شود.
	خرابی پمپ تقویتی یا شل شدن پیچ های اتصال	با نمایندگی خدمات محلی تماس بگیرید.
	کافی نبودن آب در پمپ تقویتی	فشار آب اصلی را افزایش دهید.
مقدار خروجی آب کم است یا اصلاً آبی خارج نمی شود.	گیرکردن فیلتر ممبران	با نمایندگی خدمات محلی تماس بگیرید.
	تعویض نکردن فیلتر به موقع	با نمایندگی خدمات محلی برای تعویض فیلتر تماس بگیرید.
آب از شیر گلوئی خارج نمی شود.	گیرکردن فیلتر کربن پس از تصفیه	با نمایندگی خدمات محلی برای تعویض فیلتر تماس بگیرید.
	گیرکردن فیلترهای پیش تصفیه	
	گیرکردن فیلتر ممبران	
کیفیت آب خروجی پایین است (طعم یا بوی نامطبوع دارد).	تعویض نکردن فیلتر کربن پس از تصفیه به موقع	با نمایندگی خدمات محلی برای تعویض به موقع فیلتر تماس بگیرید.
	خراب شدن فیلتر ممبران	

فیلتر کربن پس از تصفیه را بشویید یا تعویض کنید.	پودر کربن ریز موجود در آب	
با نمایندگی خدمات محلی تماس بگیرید.	خراب شدن سوئیچ فشار بالا شیر برقی نسبت آب فاضلاب آسیب دیده است	پمپ تقویتی به طور دائم کار می کند و خاموش نمی شود.

۴. پارامترهای فنی

NL-3049WH	مدل
۲۴۰-۱۱۰ ولت ~	ولتاژ محاسبه شده
۶۰/۵۰ هر ترز	فرکانس رتبه بندی شده
۷.۸ لیتر در ساعت	جریان نامی آب تصفیه شده
فیلتر رسوب PP ۱۰ اینچی	مرحله ۱
فیلتر کربن فعال پیش از تصفیه ۱۰ اینچی	مرحله ۲
فیلتر کربن بلاک ۱۰ اینچی	مرحله ۳
فیلتر اسمز معکوس ۱۰ اینچی ۷۵ گالری	مرحله ۴
فیلتر کربن فعال پس از تصفیه T33	مرحله ۵
آب لوله کشی	آب قابل استفاده
۷۸۵*۳۶۰*۴۰۰ (میلی متر)	ابعاد بسته بندی (L*W*H)



عکس بالا فقط برای مرجع است. لطفاً ظاهر محصول
واقعی را به عنوان استاندارد در نظر بگیرید.

دستگاه تصفیه آب

دفترچه راهنما

مدل: NL-3049WH

قبل از نصب و راه اندازی دستگاه تصفیه آب، لطفاً دفترچه راهنما را به
دقت بخوانید و آن را برای مراجعات بعدی نزد خود نگه دارید